



PCT/GB 2003 / 0 9 1 4 6 2

REC'D PGT 10 04 OCT 2004

10/510062

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 21 MAY 2003

WIPO PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

### BEST AVAILABLE COPY

Signed

Dated 1 May 2003



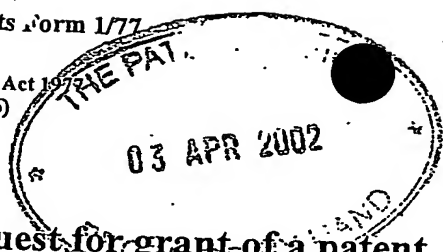

# The Patent Office

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

03 APR 2002

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference P103736GB/JKH /4742

2. Patent application number  
(The Patent Office will fill in this part)

0207732.9

04APR02 E708354-2 D01038  
P103736GB 0.02 0207732.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

TTPCommunications Limited  
Melbourn Science Park  
Cambridge Road  
Melbourn  
Royston  
Hertfordshire  
SG8 6EE  
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8356727001

4. Title of the invention

WIRELESS COMMUNICATION TERMINALS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s)

Abstract

Drawing (s) 1 1 1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

*Wittes & Rogers*  
Signature

Date 2nd April 2002

12. Name and daytime telephone number of person to contact in the United Kingdom
- Jeff K Hogg 0117 925 3030

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## WIRELESS COMMUNICATION TERMINALS

This invention relates to wireless communication terminals, especially mobile telephones, and the hands-free activation of such terminals.

It is known to incorporate voice recognition software in mobile telephones to allow users to dial a caller by name. However, in order to make use of this facility, the telephone has to be operated manually because, even when in the standby mode, the audio system is not normally turned on. Instead, the receiver only is powered up to receive the paging channel to check for incoming call requests, and for reasons of power saving, the audio system remains turned off.

According to the invention, a wireless communication terminal is adapted so that it is capable of recognising a predetermined sound in the vicinity of the terminal and its audio input system is powered on periodically when the terminal is in the standby mode and serves to activate the terminal if said predetermined sound is recognised.

Preferably, the audio input system is powered up with the paging channel, and preferably only operates during the paging channel for reasons of power saving, and then processes the received audio signal to recognise said predetermined sound if it is present. In a DSP based GSM terminal, the same DSP processor is used for the radio modem and audio processing, and therefore powering up the processor for paging will automatically make the audio processing function available and produce said audio signal if the audio input system is also powered up.

The paging channel in a mobile telephone consists of a number of paging blocks of short duration separated by an interval of 0.5 to 2.5 seconds. For example, a GSM terminal has a paging channel of four data blocks or bursts, each 4.615 ms long. Each burst has a portion allocated to radio modem processing and the remainder allocated to audio processing, which over four bursts might total 16 ms. Thus, the audio input system of a GSM terminal according to the invention has to recognise said predetermined sound over a short interval of about 16 ms, which would be difficult for a speech pattern. Preferably, therefore, the

sound selected is a whistle, which has a narrow bandwidth characteristic and changes only slowly with time so that it can be more easily recognised from a short sample. Also, a whistle can be more easily distinguished from other sounds and will therefore avoid false responses.

The invention is therefore based on the fact that sound recognition is a useful function that can be switched on periodically in a mobile telephone during the standby mode, either with the paging channel or any other short duration channel such as a monitoring channel, and can then be used to recognise narrow bandwidth sounds such as a whistle, to activate the telephone. Once activated, the telephone may then be responsive to voice commands and may then support a speaker phone mode of application.

The invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 is a schematic diagram of the major functions of a GSM mobile telephone terminal;

Figure 2 is a schematic diagram of successive data frames or bursts in a GSM mobile telephone system; and

Figure 3 is a graph showing the power spectrum of normal speech and a whistle.

A typical GSM mobile terminal, as illustrated in Figure 1, comprises a radio module 1 for receiving and transmitting radio signals in respective receiving and transmitting paths RX, TX, a modem 2 to process the signals in the receive and transmit paths, a channel coder 3 to process signals in transmit and receive channels and a speech coder 4 to process speech signals which are either output to a speaker module 5 or received from a microphone module 6. It will be appreciated that the modem 2, channel coder 3 and speech coder 4 are normally incorporated in one digital signal processor DSP, and a rechargeable battery power unit 7 supplies power to all of the above components.

When such a GSM mobile terminal is in the standby mode, the power unit 7 only powers up the radio module 1 and DSP on a low duty cycle to receive a paging radio channel to check whether an incoming call is being requested. The speaker module 5 and microphone module 6 are not powered up in the standby mode in order to save power until such time as they may be required.

The paging channel in GSM consists of four data frames or bursts, each 4.615 ms long, as shown in Figure 2. The DSP is therefore powered up for about 18.5 ms, and this is repeated at an interval of 2.1 seconds. During each burst, the DSP is only processing data relating to the radio modem function, and this only occupies a minor part of the burst, the remaining major part of the burst being reserved for audio processing when the terminal is in call. The total reserved time for audio processing between four bursts totals about 16 ms, and it is a feature of the invention, that this reserved audio processing time is used by powering up the microphone module 6 during this time so that the audio input it generates is processed and compared with a predetermined audio input which is indicative of a "wake up" command from the user.

Said predetermined audio input is preferably a whistle, this having a narrow bandwidth characteristic which makes it more easily recognisable from a short sample, as illustrated in Figure 3. The graph shows typical power spectra for both a whistle and normal speech, and illustrates the fact that a whistle is essentially a fairly pure single audio tone, whereas speech contains significant power in more bands across the range. Thus, whistles can be detected from only a short time period because they are easily distinguished from other sounds such as background acoustic noise, which has no sharp peaks, speech which has multiple "formant" frequencies, and music, which like speech has multiple frequencies present.

It is not necessary that the whistle is of a particular pitch or even that the pitch is held constant with time. The recognition algorithm would merely take a snapshot of the signal and look for a single narrow-band peak much higher than the surrounding signal at other frequencies.

The key feature of the whistle is that it is narrow-band at all times; it is therefore not necessary to scan for it continuously in order to detect it. The GSM paging cycle allowing 16 ms samples of speech at a maximum of 2.1s intervals is therefore sufficient for whistle recognition.

In a simple implementation, it would be necessary for the user to keep whistling for this maximum interval of 2.1s to ensure that at least one block of audio samples is captured. However, if it turns out that this is too long to maintain a whistle, then the whistle length could be reduced with an increase in power consumption.

A suitable whistle recognition algorithm needs to detect a narrow-band signal of unknown frequency in the presence of speech with low false alarm probability. A pre-shaping filter would be provided to remove low frequency components from the signal which would otherwise affect the recognition process.

Reasonable recognition/false alarm results have been obtained using the following algorithm:-

- (i) If the energy of the block of audio samples is above a threshold then take the FFT for 128 samples sampled at 8kHz;
- (ii) find the largest energy bin and find the width of the peak to half the peak power;
- (iii) find the next largest peak excluding the interval found in (ii);
- (iv) if the ratio of the energy in the first peak of the second peak is  $> 10\text{dB}$  then declare that the whistle has been recognised.

An alternative non-linear approach is based on the low variance of the phase increment per sample in the audio block for a whistle compared with speech.

Although the algorithm has been discussed in terms of GSM, it will be appreciated that it can be generalised for any wireless communications system. The only requirement is the capability to periodically switch on the audio hardware to sample 16 ms of audio data. All mobile phone systems should fulfil this requirement since the mobile will need to switch

itself on periodically either to listen for paging signals (or their equivalent) or for network measurements, and being a phone it should have the appropriate audio capabilities. As long as this duty cycle is sufficient, the algorithm need not be modified.

In one embodiment of the invention, a mobile terminal is further adapted to include voice dialling and speaker phone operation. The user is then able to use the terminal in hands-free mode as follows:

- (i) user whistles;
- (ii) terminal responds with an acknowledgement, probably audible, e.g. a beep or some pre-recorded message or tune;
- (iii) user says the voice command, e.g. a name to be dialled;
- (iv) user engages in the call (using speaker phone operation) - or executes whatever other command has been pre-programmed.

Speaker phone operation with a mobile terminal requires a loud audio output and some form of echo control.



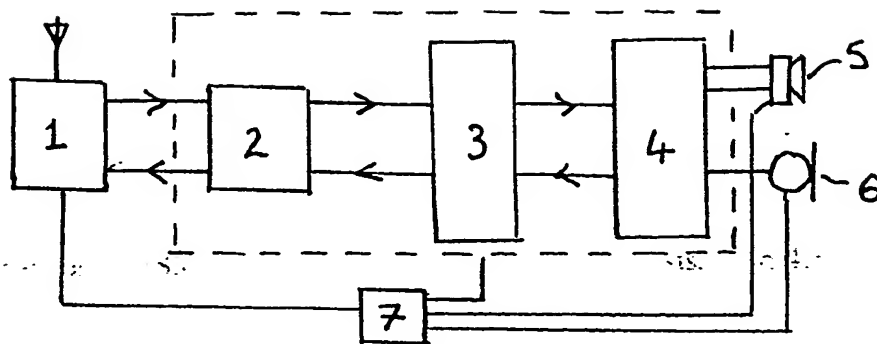


FIG. 1.

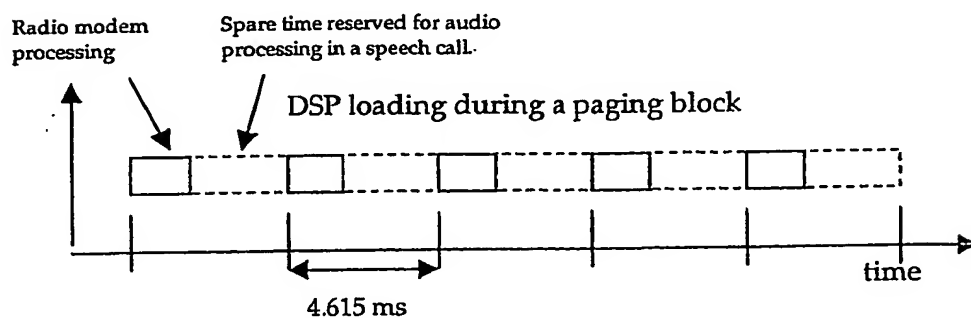


FIG. 2.

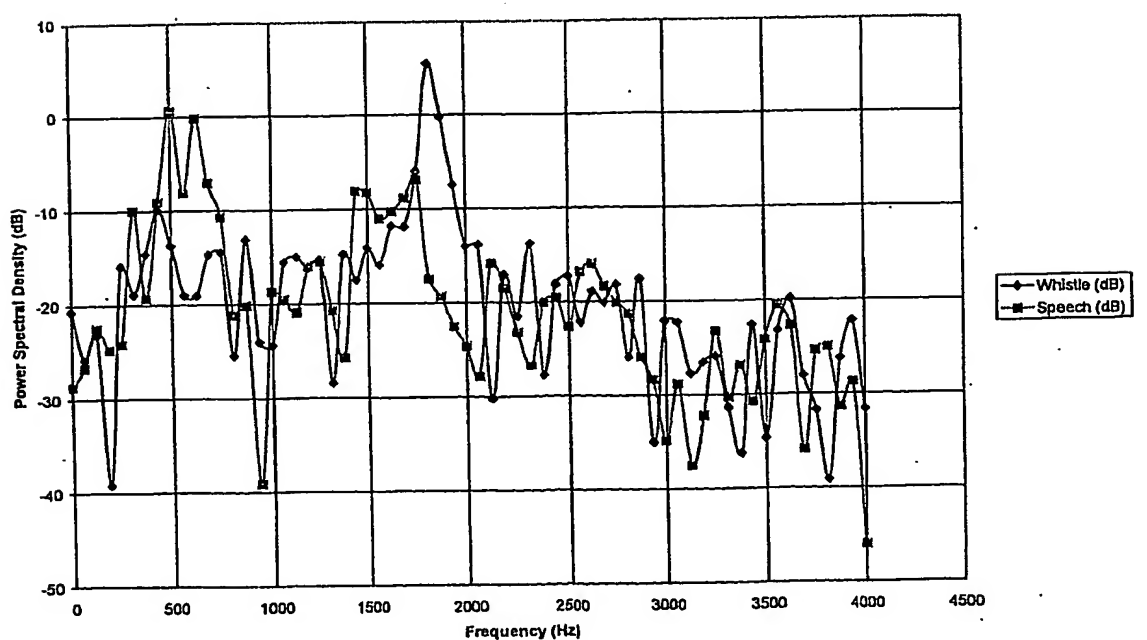


FIG. 3.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**